

BP100G1 Tech Sheet

Customer: Balboa Water Group

Part Number: 59187-01 5.5kW 800 Incoloy
59188-01 4.0kW 800 Incoloy
59251-01 Remote Heater System -- Heater is sold separately

Custom Box Overlay ☐
Box Overlay Part Number N/A

UL System Model For 5.5kW: BP1-BP100G1-BU
UL System Model For 4.0kW: BP1-BP100G1-BS
UL System Model For Remote: BP1-BP100G1-B
Software Version ID: M100_230 V52.0
Software Version: 52.0
File Name: BP100_52.0_BP100G1.hex
Configuration Signature: E1177576

Eng. Project Number: 5270

Control Panels (See later pages for more information):

spaTouch™ 2	Any version (version 2.0 or later required for bba™ 2 fully integrated functionality)
Icon spaTouch™	Any version (version 3.36 or later required for bba™ 2 fully integrated functionality)
Menued spaTouch™	Any version (version 2.8 or later required for bba™ 2 integrated functionality)
TP900	Version 3.1 and later (Version 3.13 or later required for bba™)
TP800	Version 3.1 and later (Version 3.13 or later required for bba™; version 4.11 or later required for bba™ 2 integrated functionality)
TP600	Version 2.7 and later (Version 2.12 or later required for bba™/bba™ 2 On/Off control via menu)
TP500	Any version
TP400T US	Version 2.7 and later (TP400T CE may be used) (Version 2.12 or later required for bba™/bba™ 2 On/Off control via menu)
TP400W US	Version 2.7 and later (TP400W CE may be used) (Version 2.12 or later required for bba™/bba™ 2 On/Off control via menu)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

System Revision History

Part #	EPN	Date	Originator	Changes Made
59187 59188	5205	04-15-19	BWG	Generic BP100G1 system, supporting all the Setups the BP100 board can do without an expander board.
59251	5205	06-05-19	BWG	Added PN for version with remote heater support. Remote heater is sold separately.
59187-01 59188-01 59251-01	5270	08-29-19	BWG	Update software for full TP500 compatibility.

bba™ & bba™2 (Balboa Bluetooth Amp) connection is documented seperately.

bba™ is integrated into graphic display panels (TP800, TP900 and spaTouch™). With TP600/TP500/TP400, use the “BT” entry on the menu to toggle bba™ power On/Off.

bba™2 is integrated into graphic display panels (TP800, TP900 and spaTouch™). With TP600/TP500/TP400, use the “BT” entry on the menu to toggle bba™2 power On/Off.

Basic Functions Setup 1 - 3

Power Requirements:

240VAC, 50/60Hz*, 48A, Class A GFCI-protected service (Circuit Breaker = 60A max.),
4 wires [hot, hot, neutral, ground]

120/240VAC, 50/60Hz**, 16/40A, Class A GFCI-protected service (Circuit Breaker = 20/50A max.)
3 or 4 wires [hot, hot (optional), neutral, ground].

****NOTE:**

The above 120V spec is only when using a wall-mount GFCI / breaker.

If using a GFCI cord, the breaker is 15A and so the service is limited to 12A.

*BP systems automatically detect 50Hz vs 60Hz. However, power frequency (50Hz vs 60Hz) is just one of many differences between North American (UL) and CE power, and it is because of these other differences that different BP systems must be used for UL vs CE territories. Also, there are a few countries that use CE power but 60 Hz (such as South Korea) which need CE systems, and a few countries that use UL power but 50 Hz which need UL systems.

HiPot Testing Note:

Disconnect slip terminal with green wires from J6 prior to performing HiPot test. Failure to disconnect may cause a false failure of the test. Reconnect terminal to J6 after successful completion of HiPot test.

Basic Functions Setup 1 - 3

System Outputs:

Pump 1	240VAC*	2-Speed	12A max	15-minute timer (30-minute timer for P1 Low in non-circ Setup 2 only)
				This is the heater pump in Setup 2. Must deliver 20 GPM through heater
		1 Speed in Setup 1		
		Unused in Setup 3		
Circ Pump	240VAC*	1-Speed	2A max	Programmable Filtration Cycles + Polling
				This is the heater pump in Setups 1 & 3. Must deliver 20 GPM through heater
Ozone	240VAC*		.5A max	Slaved to Circ Pump in Circ Setups and to Pump 1 Low in Non-Circ Setups
Spa Light	10VAC	On/Off	1A max	240-minute timer.
A/V (Stereo)	120VAC	Hot	4A max	Always on
Heater	5.5kW @ 240VAC (approx 1.4kW @ 120VAC)			
	4.0kW @ 240VAC (1.0kW @ 120VAC)			

*Pump 1, Circ Pump and Ozone must be the same voltage.

With 120VAC power input, Pump 1, Circ pump and Ozone must all be 120V. See wiring diagram for rewiring instructions.

Setup Reference Table

Setup #	Circ Pump	Pump 1	Temp Scale
1	Programmable Filtration + Polling	1-Speed	°F
2	None	2-Speed	°F
3	Programmable Filtration + Polling	None	°F

System (and any replacement board) **is shipped in Setup 2**

Changing Software Setups with spaTouch™ Icon-Driven Panels

Test Menu Access (S1, Switch 1 ON) *Service Technician ONLY.*

DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!


While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON.

The system will enter Test Mode.





Moving DIP Switch 1 to OFF will exit Test Mode.

To Change Software Setups:

While in Test Mode, press the indicated icons to move from screen to screen.

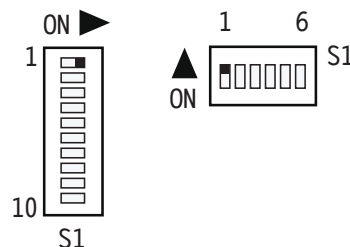


The example screens shown here are from the spaTouch 1 Icon-Driven Panel, but the screens on the spaTouch 2 Panel are similar. The main difference is that the spaTouch 2 display is wider.

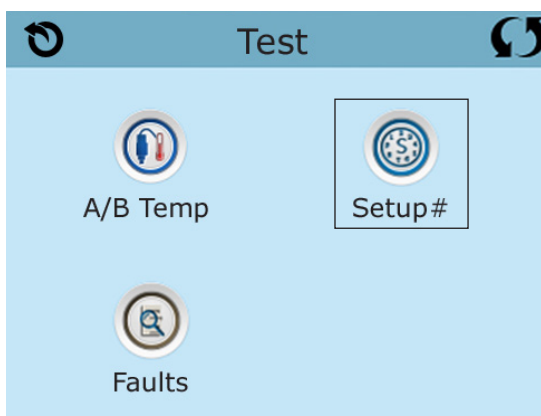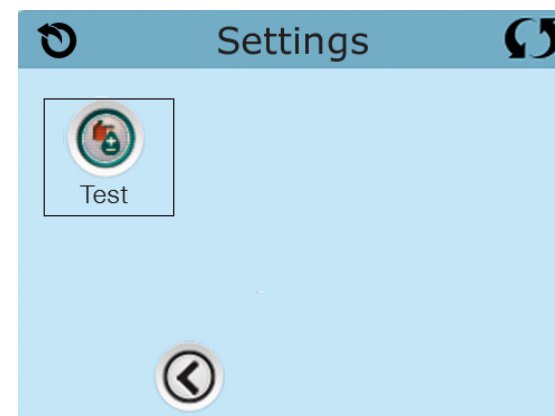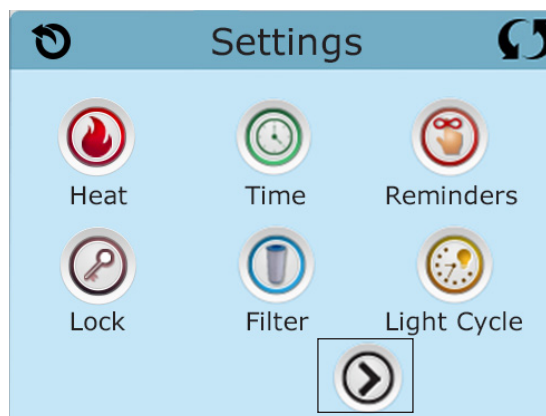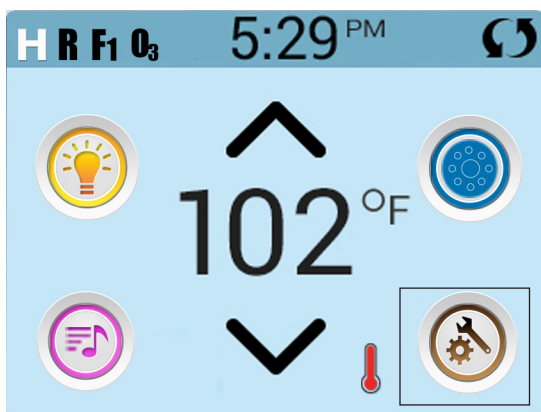

Once on the Setup Selection screen, press the Up or Down icon to select the desired Setup Number, then press the Check Mark icon to confirm and to have the spa restart.

After the system restarts, you may see a message that "The settings have been reset"; this is normal after changing Setups with DIP Switch 6 in the OFF position. Press "Clear" to dismiss this message.

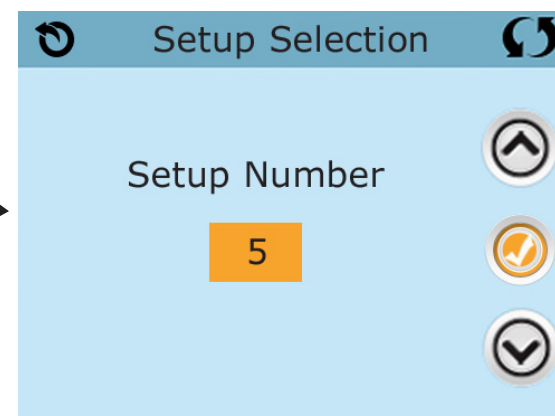

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

BALBOA
water group

Changing Software Setups with TP800 / TP900 / spaTouch™ Menued Panel


Test Menu Access (S1, Switch 1 ON) *Service Technician ONLY.*

DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!

While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON.

The system will enter Test Mode.


Moving DIP Switch 1 to OFF will exit Test Mode.



Software Setups

Under the TEST Menu, the Setup screen will allow changing the Setup from 1 to any number established by the Manufacturer.

Changing the Setup may require wiring changes as well.

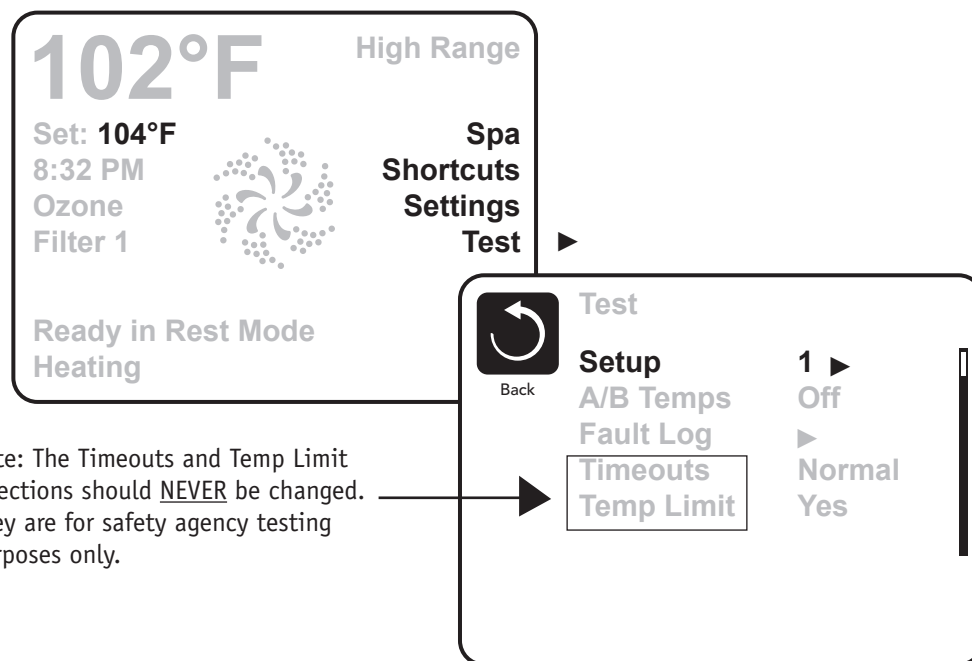

Changing Software Setups with TP600 / TP500 / TP400


Test Menu Access (S1, Switch 1 ON) *Service Technician ONLY.*

DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!

While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON.

The system will enter Test Mode.

Moving DIP Switch 1 to OFF will exit Test Mode.

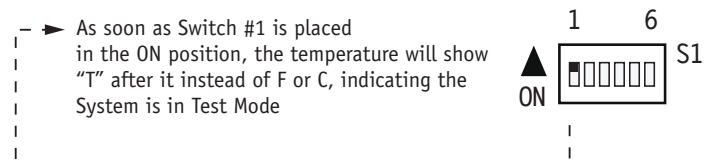

Software Setups

Under the TEST Menu, the Setup screen will allow changing the Setup from 1 to any number established by the Manufacturer.


Changing the Setup may require wiring changes as well.

You will have 1 minute to complete the setup change after you manually exit Priming Mode. (Once familiar with the process, the Setup change should take less than 15 seconds.)



When the panel displays RUN PMPS PURG AIR, press any Temperature button ONCE to exit Priming Mode.

You should see "---T" where the T indicates the system is in Test Mode.



Continued on Next Page.

Changing Software Setups with TP600 / TP500 / TP400 Continued

Again, **You will have 1 minute** to complete the setup change after you manually exit Priming Mode.

NOTE: Wherever the below says Warm or Temp followed by Light, on the TP500 press Menu instead of Warm or Temp followed by light. And whenever the chart below says Light, on the TP500 press Menu instead of Light.


Immediately after exiting Priming Mode, press this sequence of buttons: Warm*, Light, Warm, Warm, Warm, Warm. Continue to press Warm until the display shows the Setup Number (S-01, S-02, etc.) you want to switch to. When the correct setup number is showing, press Light once, and the system will reset, using the newly-selected Setup from that point on.

Move DIP Switch 1 to the OFF position to take the spa out of Test Mode. °F or °C will replace °T.

Using a permanent marker, write the Setup number on the Setup label mounted inside the system lid (right). This is very important to any service person in the future who may need to replace a circuit board or system and needs to change the Setup on a replacement part while in the field.

NOTE: Changing the Setup may require wiring changes as well - refer to the wiring diagram or wiring diagram addendum.

THIS SYSTEM IS
CONFIGURED AS
SETUP #

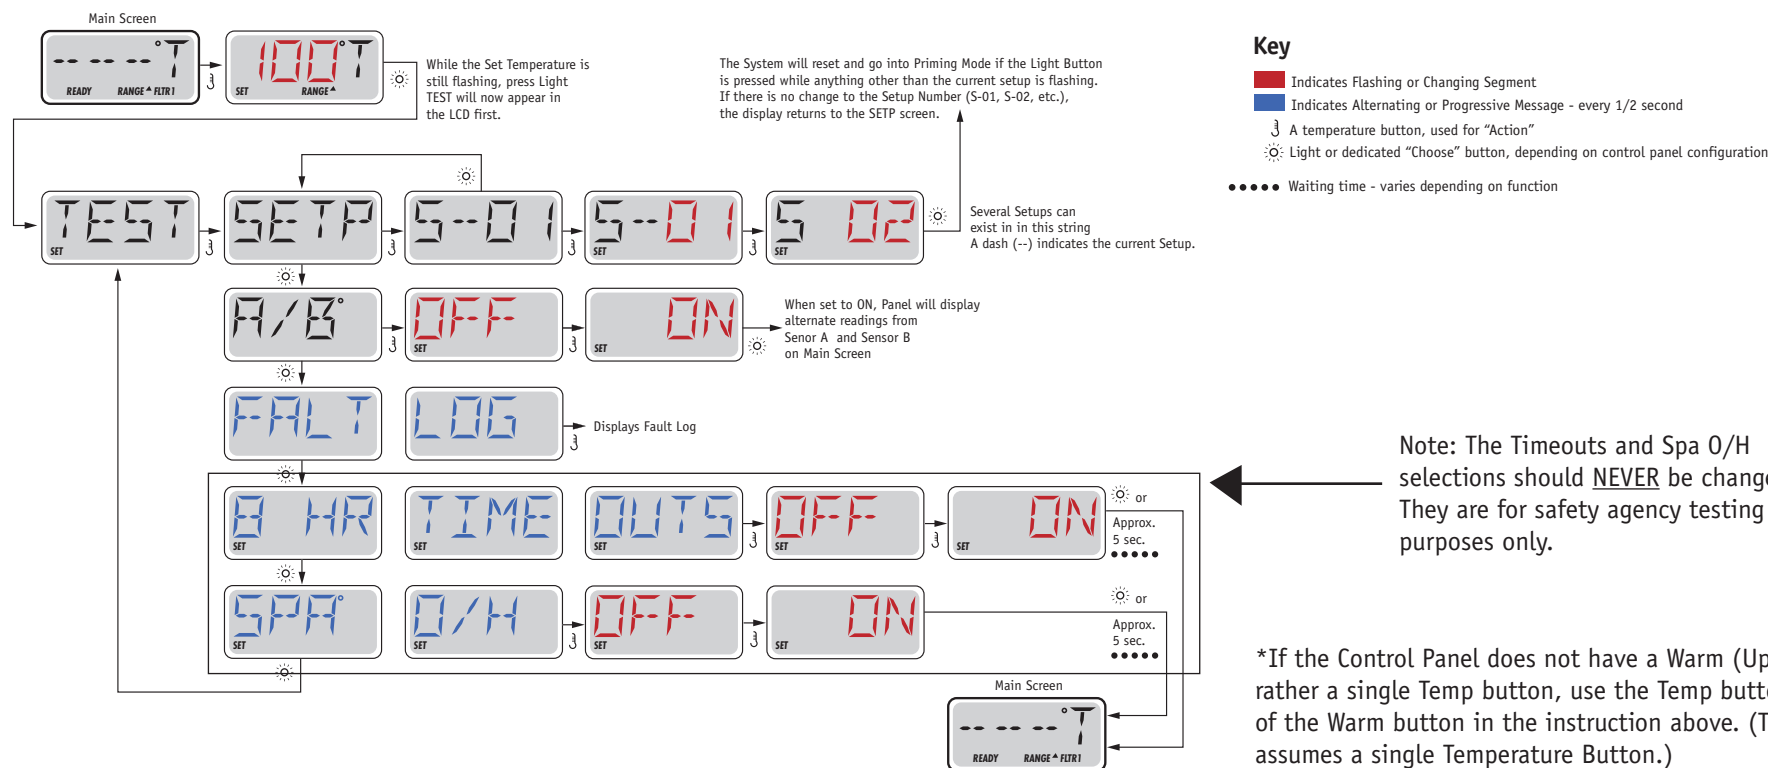

Equipment Expansion

Expansion Features

Control Connection

Relay 1 (J5)

Default

None

Fuse

N/A

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.



DIP Switch Functions

Fixed-function DIP Switches

- | | |
|----|--|
| A1 | Test Mode (normally Off). |
| A2 | In "ON" position, add one high-speed pump (or blower) with Heater. |
| A3 | In "ON" position, add two high-speed pumps (or 1 HS Pump and Blower) with Heater. |
| A5 | In "ON" position, enables Special Amperage Rule B. See Special Features section under Configuration Options for functionality with your system.
In "OFF" position, enables Special Amperage Rule A. |
| A6 | Persistent memory reset (Used when the spa is powering up to restore factory settings as determined by software configuration). |



A2 and A3 work in combination to determine the number of high-speed devices and blowers that can run before the heater is disabled. i.e. A2 and A3 in the ON position will allow the heater to operate with up to 3 high-speed pumps (or two HS Pumps and Blower) running at the same time. Heat is disabled when the fourth high-speed pump or blower is turned on.




Note: A2/A3 all off = No heat with any high-speed pump or blower.

Assignable DIP Switches

- | | |
|----|--|
| A4 | In "ON" position, enables a 5-minute cooldown for some gas heaters (Cooling Time B).
In "OFF" position, enables a 1-minute cooldown for electric heaters (Cooling Time A). |
| A7 | In "ON" position, Simplified Menus on TP400/TP500/TP600. <u>Do not</u> use graphic panels (TP800, TP900, or spaTouch™ family) with Simplified Menus.
In "OFF" position, Regular Menus on TP400/TP500/TP600. This setting is compatible with all panels. |

Undesignated switches are not assigned a function.

Jumper Definitions

J109	GFCI Test/Trip Enable/Disable Note: This feature must be enabled in software as well.	J109 
J30	Do Not Use	
J31	Jumper on 1 pin when heater voltage is 120V Jumper on 2 pins when heater voltage is 240V	J31 
J24	Jumper on center two pins (240V) when heater voltage is 240V. Two Jumpers installed; one on left 2 pins and one on right 2 pins (120V) when heater voltage is 120V.	

Warning!

Setting DIP switches or jumpers incorrectly may cause abnormal system behavior and/or damage to system components.
Refer to Switchbank illustration on Wiring Configuration page for correct settings for this system.
Contact Balboa if you require additional configuration pages added to this tech sheet.

Replacement Parts

PCBA:

Main PCBA: 59189-01
Expander PCBA: N/A

HEATER(s):

Heater: 58421 5.5kW 800Inc -- for integral heater only
58426 4.0kW 800Inc -- for integral heater only
Temp Sensor Kit: 30344KIT 12-inch sensor -- for integral heater only
30382KIT 24-inch sensor -- for integral heater only

FUSES:

Part Number	Amperage	Location
30136	30A	F6
26983	1A	F4, F5
24514	0.1A SLO	F3 when using 240V heater
26982	0.16A SLO	F3 when using 120V heater

BP100 Configuration Options

General Features

Feature	Default	
Pump 1 in Filter Cycle (Circ Only)	No	
Pump 1 Low Timer	30 Minutes	Applies in non-circ Setups (configurations) only
General Pump Timer	15 Minutes	
Blower Timer	15 Minutes	
Mister Timer	15 Minutes	
Light Timer	240 Minutes	
Circ (when enabled)	Programmable + Polling	
Cleanup Cycle	<i>30 Minutes</i>	
Cleanup as Preference setting	<i>Yes</i>	
Ozone	With Heater Pump*	
Ozone Suppression	OFF	
Pump Purge	60 Seconds	
Blower Purge	30 Seconds	
Mister Purge	5 Seconds	
Purge Type	Serial - Pumps at lowest speed	

* The heater Pump can be either a Circ Pump or Pump 1 Low.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

BP100 Configuration Options

Temperature Features

Feature Default

Temperature Display

°F

All temperatures must be specified in °F. The system converts °F to °C dynamically. If Celsius is required for default settings, choose a desired °C value that (after rounding) corresponds to a Fahrenheit value.

°C	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
°F	39	41	43	45	46	48	50	52	54	55	57	59	61	63	64	66	68	70	72
°C	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
°F	73	75	77	79	81	82	84	86	88	90	91	93	95	97	99	100	102	104	

Hi-Range Min. Set Temp

80°F

Hi-Range Max. Set Temp

104°F

Hi-Range Default Temp*

100°F

Lo-Range Min. Set Temp

50°F

Lo-Range Max. Set Temp

99°F

Lo-Range Default Temp*

70°F

Freeze Threshold

44°F

Freeze Type

Rotating - Pumps at Lowest Speed

Temp Lock Type

Temp + Settings

**May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

BP100 Configuration Options

Time Features

Feature	Default
Time Format*	12 Hour
Filter 1 Start Hour*	20:00 (8:00 PM)
Filter 1 Duration*	2 Hours
Filter Cycle 2 Default*	OFF
Filter 2 Start Hour*	08:00 (8:00 AM)
Filter 2 Duration*	15 Minutes
Light Cycle	Disabled
Light Cycle Default*	OFF
Light Cycle Start Hour*	21:00 (9:00 PM)
Light Cycle Duration*	15 Minutes
Cooling Time A	1 Minute
Cooling Time B	5 Minutes

**May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

BP100 Configuration Options

Reminder Features

Feature	Default
Reminders Shown*	<i>Yes</i>
Check pH	<i>OFF</i>
Check Sanitizer	<i>OFF</i>
Clean Filter	30 Days
Test GFCI	OFF
Drain Water	<i>100 Days</i>
Change Cartridge	OFF
Clean Cover	<i>OFF</i>
Treat Wood	<i>OFF</i>
Change Filter	365 Days

**May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

Special Features



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

TP900 Panel Configuration



Button Layout Table

Button #	Setup 1	Setup 2	Setup 3
1	N/A	N/A	N/A
2	Jets 1	Jets 1	Light
3	Light	Light	Invert
4	Invert	Invert	(Circ Icon)
5	(Circ Icon)	Undefined	Undefined
6	Undefined	Undefined	Undefined
7	Undefined	Undefined	Undefined
8	Undefined	Undefined	Undefined
9	Undefined	Undefined	Undefined
10	Undefined	Undefined	Undefined
11	N/A	N/A	N/A
12	N/A	N/A	N/A
13	Jets 1	Jets 1	Undefined
14	Undefined	Undefined	Undefined
15	Light	Light	Undefined
16	Invert	Invert	Undefined

Spa Screen



Shortcuts Screen



A Circ Icon will appear when a Circ Pump is configured

TP800 Panel Configuration


Button Layout Table

Feature #	Setup 1	Setup 2
A1	N/A	N/A
A2	Jets 1	Jets 1
A3	Light 1	Light 1
A4	Invert	Invert
A5	(Circ Icon)	Undefined
A6	Undefined	Undefined
A7	Undefined	Undefined
A8	Undefined	Undefined
A9	Undefined	Undefined
A10	Undefined	Undefined
A11	N/A	N/A
A12	N/A	N/A
A13	Undefined	Undefined
A14	Undefined	Undefined
A15	Undefined	Undefined
A16	Undefined	Undefined
B1	Jets 1	Jets 1
B2	Undefined	Undefined
B3	Undefined	Undefined
B4	Light 1	Light 1


TP800 is not officially supported in Setup 3.

TP800 Panel Configuration

Spa Screen

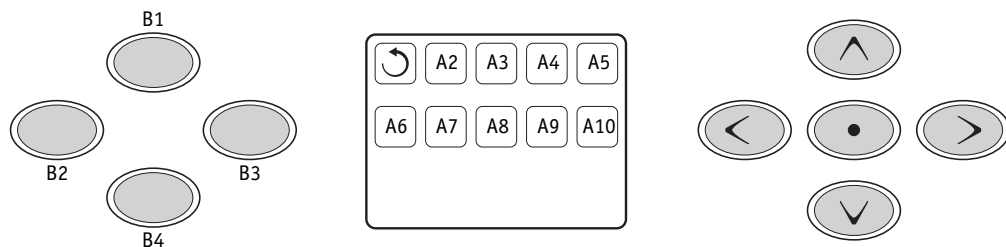

Shortcuts Screen

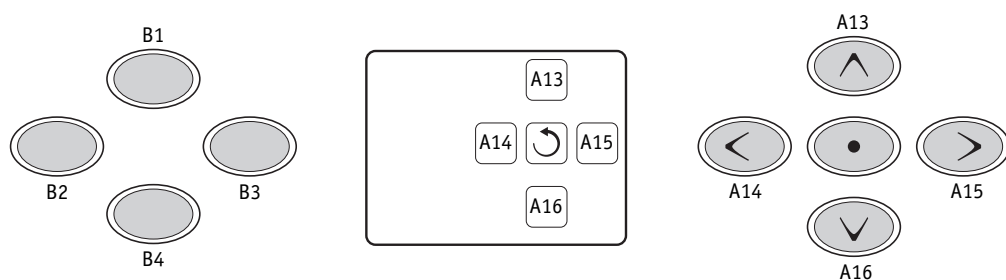

Note: Buttons 11 and 12 are not used in this configuration.


Button 1 is fixed.

TP600 Panel Configuration

Button Layout Table

Button #	Setup 1 & 2
1	Jets 1
2	Undefined
3	Invert
4	Up
5	Light 1
6	Down
LED 1	Jets 1
LED 2	Undefined
LED 3	Light 1
LED 4	Heat On

TP600 is not officially supported in Setup 3.

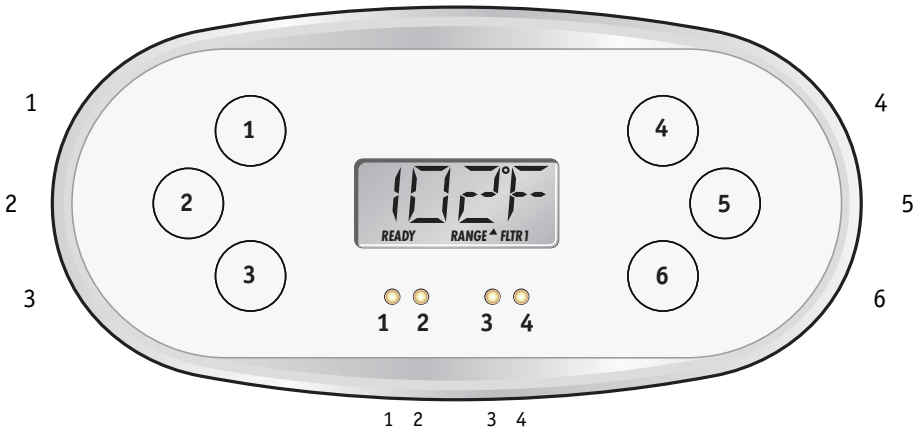

TP600


55676-XX

No Overlay

TP400 Panel Configuration

Button Layout Table for TP400T

Button #	Setup 1 & 2	Setup 3
1	Temperature	Up
2	Jets 1	Down
3	Light 1	Light 1
4	Undefined	Undefined
LED 1	Heater ON	Heater ON
LED 2	Jets 1 ON	Undefined
LED 3	Light ON	Light ON
LED 4	Undefined	Undefined

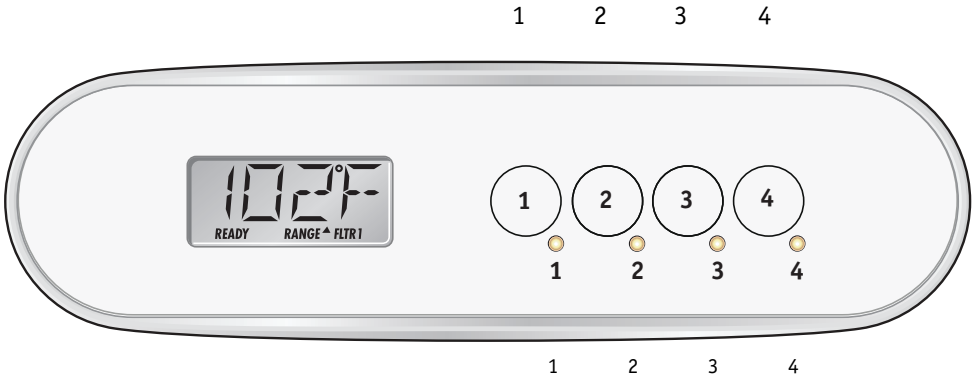

TP400T US

50380-XX
Includes overlay PN 12511.

Button Layout Table for TP400W

Button #	All Setups
1	Up
2	Down
3	Light 1
4	Jets 1
LED 1	Heater ON
LED 2	Undefined
LED 3	Light ON
LED 4	Jets 1 ON

TP400W US

50384-XX
Includes overlay PN 12510.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.